



SAFETY BLOC[®] 120

3i-Bauplatte ND 300
System Mercor Dunamenti



ASSEMBLY INSTRUCTIONS

Solution for more safety in construction!

Assembly: Simple - Safe - Clean

PROCESSING GUIDELINES
LESS EFFORT - MAXIMUM SAFETY

DELIVERY OF SAFETY SAFETY BLOC[®] 1




The **SAFETY BLOC 120** is available with a basic format of 160x60 cm / 120x60 cm / 80x60 and is delivered on a pallet. A fork lift or a construction crane (with fork) can be used for unloading.

SIZE CHANGE OF SAFETY SAFETY BLOC[®] 2



SAFETY BLOC 120 can be cut to the desired size by hand or with an electric saw.

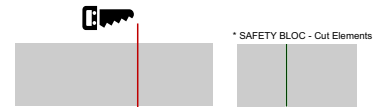


*Cut elements can only be glued together using ENT-VER fire protection foam and placed on the formwork for concreting.

PLACING SAFETY BLOC[®] ON FORMWORK 3



The **SAFETY BLOC 120** is placed on the formwork and, if necessary, secured against slipping with steel pins.

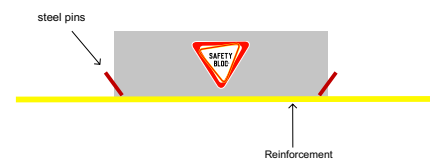

SAFETY BLOC[®] REINFORCEMENT 4



When laying **SAFETY BLOC 120**, no formwork oil may be used, as otherwise adhesion with the concrete is no longer ensured.



Guideline
Manufacturer shall not be liable for assembly errors.

Sales International Ent-Ver GmbH | Schweidlgasse 15/7a | 1020 Wien
e-mail: j.tockner@ent-ver.com | mobil: +43 664 122 49 13

Ausgabe
EN-06.04/2020

www.safety-bloc.com



SAFETY BLOC[®] 120

3i-Bauplatte ND 300
System Mercor Dunamenti



ASSEMBLY INSTRUCTIONS

Solution for more safety in construction!

Assembly: Simple - Safe - Clean

PROCESsing GUIDELINES
LESS EFFORT - MAXIMUM SAFETY

SAFETY BLOC[®] CONCRETING 5



During concreting the **SAFETY BLOC 120** must be free of snow, ice and frost!

Shake properly when concreting!



SAFETY INSTRUCTION ATTACHED = FALL PROTECTION ENSURED 6




After the concrete has dried out, a **STICKER** with safety instruction for **SAFETY BLOC 120** must be applied.

From this point the protection from fall up to ~ 1.000kg is ensured!




Only for human safety!

No shores are allowed on **SAFETY BLOC 120** to support the subsequent storey.

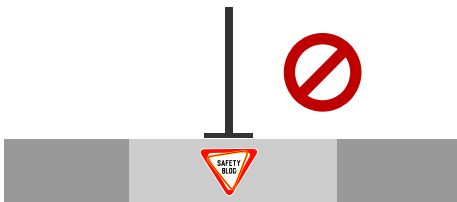

SAFETY BLOC[®] FURTHER PROCESSING 7

3i driller set:

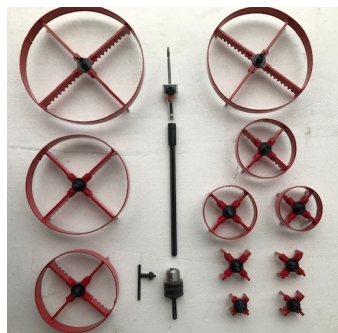

consisting of drill and adapter for all commercially available devices!

The **SAFETY BLOC 120** can drilled for the feedthroughs using a 3i drill set.*



Once a single hole in the **SAFETY BLOC 120** is made, regardless of size, distance or diameter, penetration protection does not exist any longer!

PROTECT ON SITE!

*You can find more information about fire protection on our product sheet **FIRE PROTECTION EI 120!**

Guideline
Manufacturer shall not be liable for assembly errors.

Ausgabe
EN-06.04.2021

■ **Sales International Ent-Ver GmbH** | Schweidgasse 15/7a | 1020 Wien
e-mail: j.tockner@ent-ver.com | mobil: +43 664 122 49 13

www.safety-bloc.com

2/2